

Next & Beyond.

ALUCOBOND

3A Composites Asia Pacific Pte. Ltd. 300 Beach Road #10-06 The Concourse Singapore 199555
Telephone: (65) 6303 9750
Telefax: (65) 6303 9751
Email: sales@alucobond.com.sg
www.alucobond.com.sg

3A Composites India Pvt. Ltd.
Bldg. No. 11, Unit No. 1112, 1st Floor
Solitaire Corporate Park
Mathuradas Vasanji Marg
Andheri (East)
Mumbai - 400 093, India
Telephone: (91) 22 4256 4500
Telefax: (91) 22 4010 4132
Email: alucobond.india@3acomposites.com
www.alucobond.in

3A Composites Gmbh Alusingenplatz 1 78224 Singen Germany
Telephone: (49) 7731 941 2060
Telefax: (49) 7731 941 2845
Email: info@alucobond.com
www.alucobond.com

3A Composites Middle East (Branch)
Almas Tower, JLT
P.O. Box: 343522
Dubai, UAE
Mobile: (97) 1 58 535 1721
Email: basel.massis@3acomposites.com
www.alucobond.com

3A Composites (China) Ltd.
Room 1902-1903
Hongkong Prosperity Tower
Mengzi Road No. 763
Huangpu Shanghai
China
Telephone: (86) 21 6315 8550
Email: alucobond.china@3acomposites.com
www.alucobond.com.cn


3A Composites USA721 Jetton Street, Suite 325
Davidson, NC 28036
United States of America
Tel: (1) 800 626 3365
Email: info.usa@3acomposites.com
www.alucobondusa.com



ALUCOBOND®

CONCRETE

Timeless face of contemporary beauty

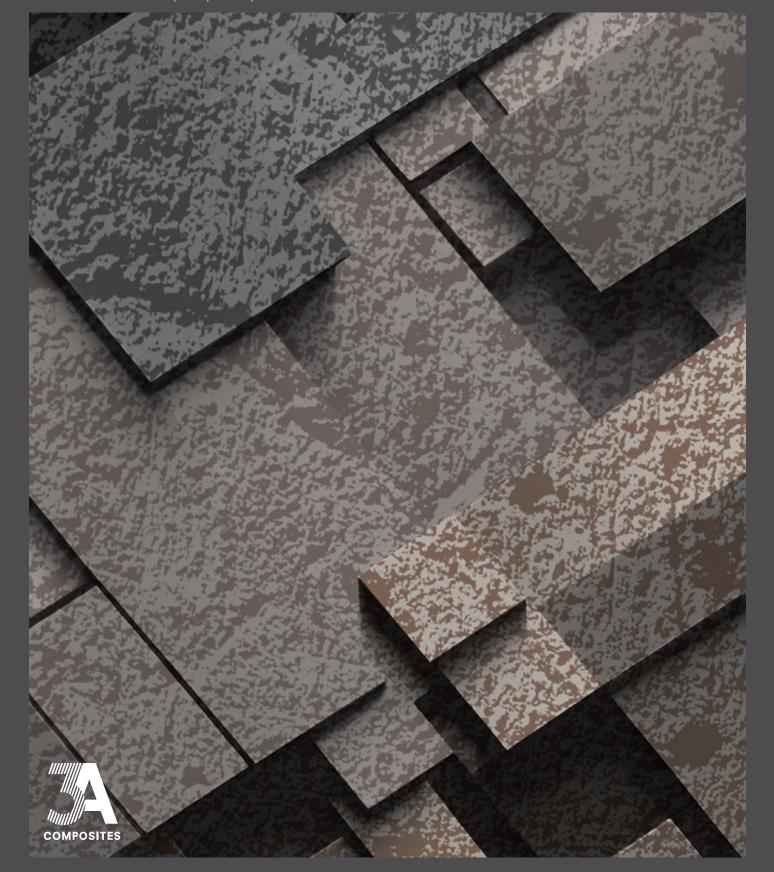



LET THE CONTEMPORARY BEAUTY TAKE OVER.

Concrete is one of the most durable manmade materials used in construction today. With its bare look, concrete is a preferred choice of many designers who expect to add contemporary look to their projects.

Compared to real concrete, ALUCOBOND® concrete, an aluminium composite material, offers numerous benefits when it comes to cladding. It not only acts as a building envelop for protection but it's thin, lightweight, rigid yet highly formable nature also provides limitless design possibilities. ALUCOBOND® concrete's high versatility enables the creation of complex 3D shapes and geometric patterns with ease.

ALUCOBOND® concrete can be used for a range of applications such as facade cladding, interiors, decorative highlighter walls, balconies and column cladding.

ALUCOBOND® concrete is designed to demonstrate a high level of sustainability in the life cycle of the material. The aluminium composite material is made of fully recyclable material and all these attributes make ALUCOBOND® concrete an ideal choice for cladding.



*This is representative of the entire pattern of the panel.


GENERAL INFORMATION

The fluorocarbon (PVDF/FEVE) coating is applied to the aluminium coil prior to lamination using a continuous coil coating process. The multiple layers are individually cured at temperatures between 200 - 260°C. The quality of the coating is tested according to standards established by E.C.C.A. (European Coil Coating Association) of which 3A Composites is a member. Fluorocarbon coating systems combine good formability and excellent surface durability. They are extremely resistant against weathering, strong solar radiation and pollution.

The colour reproduction in this chart is subject to printing limitation. For exact colour matching, request for actual colour samples. The standard gloss for colours is between 30%- 40% according to the Gardner Scale.

Minimum order quantities apply. For more information and product specification please refer to your nearest ALUCOBOND® representative.

We have roughed it out to bring you some of the most breathtaking contemporary concrete shades that will truly embellish your creations.

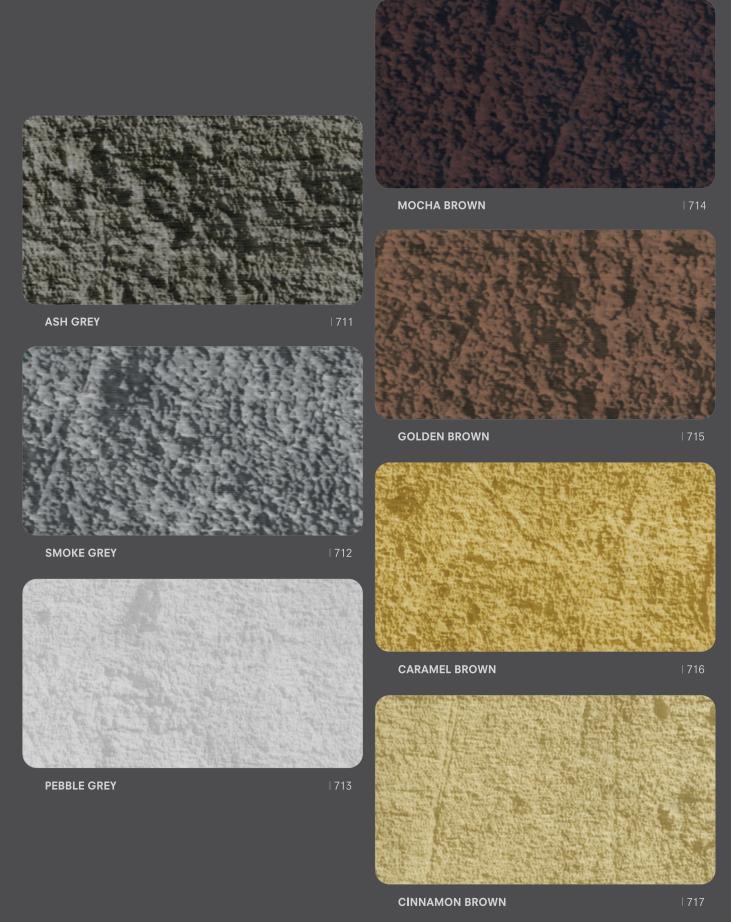



_____ 03